



FOOD, BEVERAGE & AGRICULTURAL PRODUCT SPECIALISTS


Watertight Wiring Devices:

- Rated Type 4X, IP69K, NSF, CSA, and Corrosion-Resistant
- Impact resistant smooth body prevents debris collection
- Available in Twist-Lock® and Straight blade configurations
- NEMA 5-15, 5-20, L5-15, L5-20 Ratings available with Power and Wiring Indicating LED's



Corrosion Resistant Devices:

- Meets requirements for Corrosion Resistant /Weather Resistant Connections
- Nickel Plated Brass Power Contacts and Mounting Strap
- Stainless Steel Mounting Screws
- Weatherproof Corrosion Resistant Covers Available in Yellow and Grey
- Available in NEMA 5-15, 5-20, L5-15, L5-20, L5-30

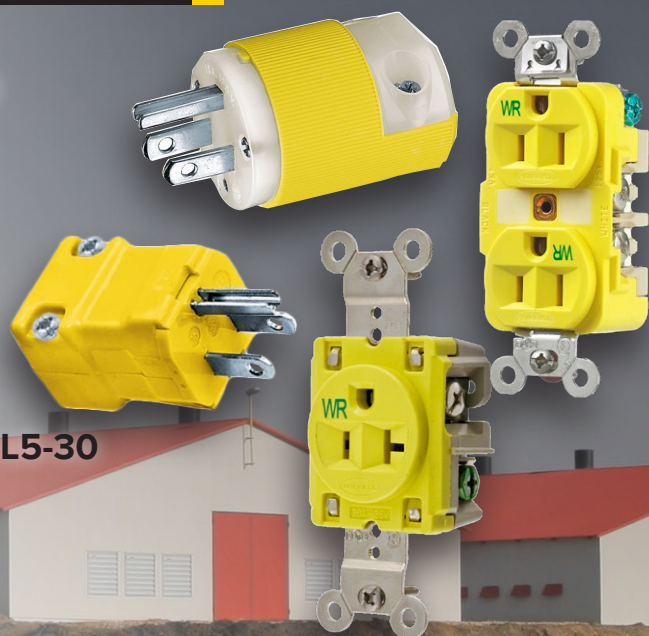

Switch Rated IEC Pin & Sleeve:

- Designed for the Most Demanding Environments
- Meets UL Type 4X, IP69K
- “Dead Front” Safety
- IEC Colour Coded
- LED Power Indication
- Rated For Up To 50HP Applications
- Available in multiple configurations from 30 to 100A, 125V 2P3W to 347/600V 4P5W



Generator Hook Up Devices:

- Single Circuit 15A 125V Transfer Switch
- Reverse Service Pin & Sleeve Devices Rated Up To 200A, 600V 4P 5W
- Reverse Service Mechanical Interlocks
- Twist Lock Inlets and Weatherproof Covers Available from 15A 125V to 50A 600V



Motor Disconnects:

- NEMA 4X, IP69K, NSF Ratings Standard
- InSight LED Switches Available
- Polycarbonate, Valox, Stainless Steel and Slope Top Versions Available
- Auxiliary Contacts Available
- Hubbell-Pro 30A and 60A Versions Available
- Handles Meet OSHA LO/TO Requirements

